



Justrite Safety Group

# 417 Bubble Sof-Tred™

Dyna-Shield™ layer with unique bubble design



# Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Linear Lengths 417 Bubble Sof-Tred™

Exceptional worker comfort due to 12.7 mm thick specially formulated compound. Protective layer of exclusive Dyna-Shield™ extends service life by 50% compared to regular microcellular vinyl.

- Available with yellow borders along sides to comply with OSHA code 1910-144
- All 4 sides are bevelled and sealed to minimize tripping hazards
- Unique bubble design provides exceptional comfort

#### Recommended use



- Dry Areas
- For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
- Medium duty

#### Colors:

- Black/Yellow
- Grey

#### Sizes:

- 60cm x 91cm
- 91cm x 150cm
- 122cm x linm
- 60cm x linm
- 91cm x linm
- 122cm x 18.3m
- 60cm x 18.3m
- 91cm x 18.3m

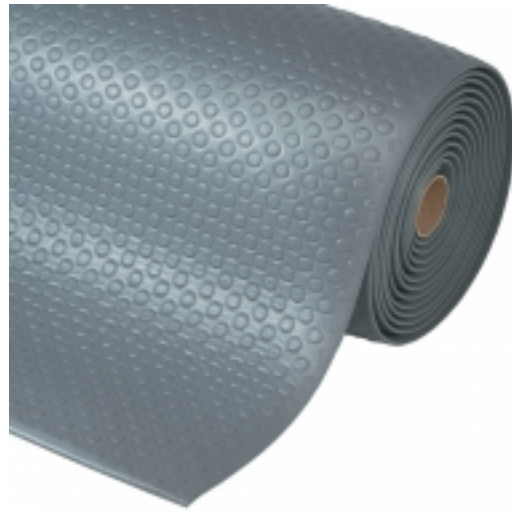

# Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Linear Lengths Bubble Sof-Tred™

## General

Brand	Notrax
Category	Dry Areas Linear Lengths
Product Number	417
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	Bubble Sof-Tred™
Recommended use	For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
Shipping Location	Barendrecht 2992SB, NL, Moselle, MS 39459, US
Type	Dry Areas - Dyna Shield™
Update trigger	20210310-1301
Usage Intensity	Medium duty

## Sustainability

Reach	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Sustainability	Recyclable material
Warranty	3

## Tests

Abrasion Resistance 1000	1.7%
Abrasion Resistance 500	0.6%
Compression Deflection 1.4	0.70 cm
Compression Deflection 2.8	0.81 cm
Elongation	140.8%
Fire rating US	Pass
Foam Battery	40 lb/in <sup>2</sup>
Hardness	20 Shore A
Slip Rating	R10
Coefficient Friction Dry	1.10
Surface Flammability	Pass
Tear Strength	13 lb

## Technical Specifications

Application	Industrial
Backing	Microcellular vinyl
Breaking Load	24.4 lb
Edges	Bevelled edges on all sides
Material	Microcellular vinyl
Material Group	Vinyl
Process	Foaming

## Bubble Sof-Tred™ Grey

Art. nr.	Dimension (cm)	Weight (kg)	Height (cm)
417S0035GY	91cm x 150cm	5.3	1.27
417S0023GY	60cm x 91cm	2.1	1.27
417C0036GY	91cm x linm	3.5	1.27
417C0048GY	122cm x linm	4.7	1.27
417C0024GY	60cm x linm	2.3	1.27
417R0024GY	60cm x 18.3m	43	1.27
417R0036GY	91cm x 18.3m	64	1.27
417R0048GY	122cm x 18.3m	86	1.27

## Bubble Sof-Tred™ Black/Yellow

Art. nr.	Dimension (cm)	Weight (kg)	Height (cm)
417S0035BY	91cm x 150cm	5.3	1.27
417C0048BY	122cm x linm	4.7	1.27
417C0036BY	91cm x linm	3.5	1.27
417C0024BY	60cm x linm	2.3	1.27
417S0023BY	60cm x 91cm	2.1	1.27
417R0024BY	60cm x 18.3m	43	1.27
417R0048BY	122cm x 18.3m	86	1.27
417R0036BY	91cm x 18.3m	64	1.27